

MEDIABANK CLASSIC

MEDIABANK: THE MOST VERSATILE DISTRIBUTOR IN THE WORLD

The Mediabank distributor is a robot programmed for the rental and sale of multimedia products. Classic is a flexible and roomy model that can satisfy the needs of any shop.

DUAL SLOT SYSTEM

Modularity and convenience

The dual slot system optimises the use of machine storage space, because the items are archived in modules. Each module can contain a VHS cassette or two DVD and CD holders. For DVD-only systems, a High Density version is also available.



FRONT OPENING

Running and maintenance speed

The front opening permits a quick access. It is easy to carry out normal maintenance on the machine, access the computer, clean or lubricate the components.



TILTED SCREEN

Full respect of privacy

The angle of the consultation screen guarantees total privacy while using the distributor and permits optimum screen vision, even in direct sunlight.



OPENING FOR REAR EXTRACTION

Internal collection and flexibility

The opening in the rear of the distributor allows the shop owner to handle item delivery from inside the shop. The less popular products are expelled automatically, leaving space in the machine for the more popular items.



DISTRIBUTOR COMPONENTS


- Computer
- LCD monitor
- Anti-vandalic keyboard or Touch-screen
- Robotic storage
- Industrial main processor
- Modem (optional)
- Dual Slot or High Density Storage
- Banknote reader (optional)
- Dynamic multiposition software
- Magnetic card reader/writer (optional bar-code card scanner)

MEDIABANK CLASSIC

TECHNICAL INFORMATION

CAPACITY	CLASSIC LCD/TS	503 VHS/1006 DVD
	CLASSIC HD LCD/TS	1678 DVD slim box

DIMENSIONS	CLASSIC	Width 1091mm	Height 1960mm	Depth 965mm
-------------------	---------	--------------	---------------	-------------

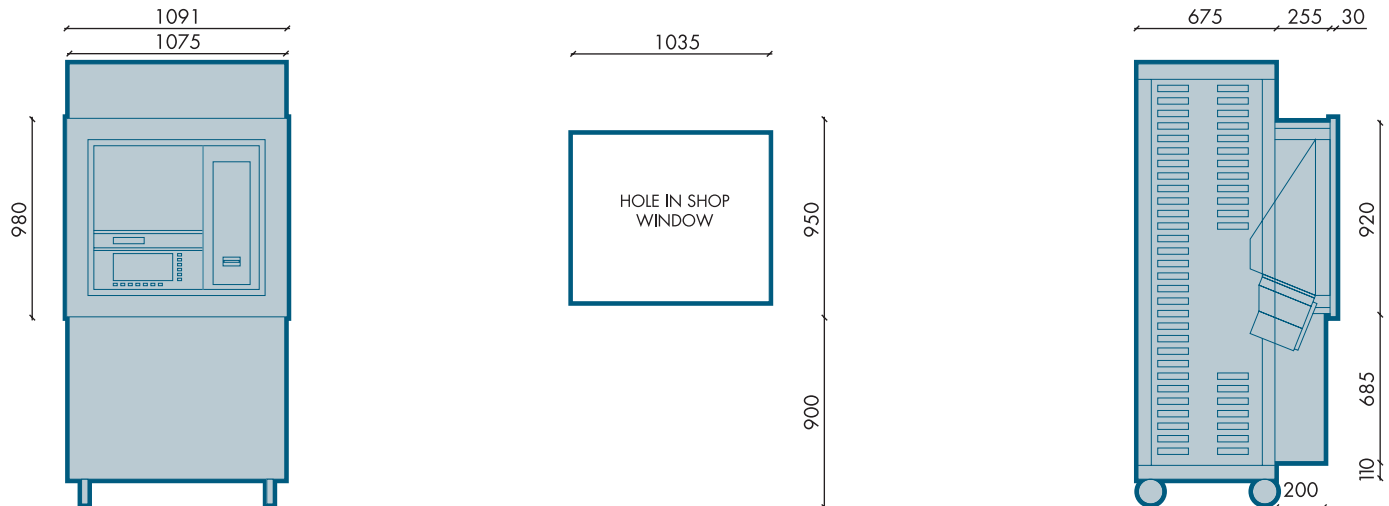


INSTALLATION

The minimum spaces necessary for correct positioning and access for maintenance must be respected when installing the machine. Wall assembly is possible if the partition has a maximum thickness of 50 mm with internal computer, of 250 with external computer.

Electric supply The distributor and computer of the operative centre should be supplied using a separate line from the central electric panel. The line must include a ground wire and be equipped with both a differential switch and a circuit breaker.

Data network The Distributor, Selector and operative centre are connected by data network cables. Cables installation shall be discussed with the technical assistance before installing the machine.

Telephone line Telephone connection is optional for transmission of media data to the control centre, for sending error signals and diagnosing hardware and software problems. Alternatively, Internet connection can be used

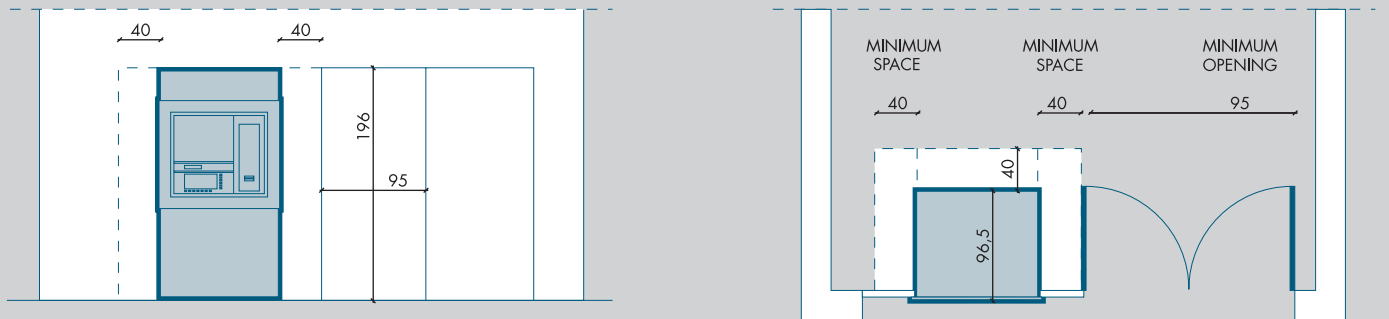

TECHNICAL SHEET OF THE CLASSIC MEDIABANK AUTOMATIC DISTRIBUTOR

- Power consumption max: 200 W +/- 10%
- Working temperature: from -5 to +40 °C
- Oven painted metal structure prepared for working outdoors
- Mains frequency: 50 Hz (60Hz optional)
- Mains voltage: 230 Vac +/- 10% (110 Vac optional)